

NSR

GMDSS

NTW-1000

PORTABLE TWO-WAY RADIOTELEPHONE



NTW-1000 TWO-WAY RADIO



NTW-1000 PORTABLE TWO-WAY RADIOTELEPHONE

- Designed to meet GMDSS requirements related with performance standards for survival craft two-way VHF radio telephone apparatus, such as IMO M.149 (77) [2003] and IEC 61097-12.
- Compact, lightweight and rugged construction.
- Easy operation, even for unskilled personnel.
- Full marine-use VHF channels.

SPECIFICATIONS

• TECHNICAL SPECIFICATION

Frequency Range: 156.025~162.975 MHz
 Operating Channels: ≥19 channels
 Operating Hours: ≥8 hours (TX10%, RX10%, Standby80%)


• BATTERY REQUIREMENTS

Battery Voltage: DC 7.2V
 Storage Temp: -30°C~+70°C
 Storage Time: 4 years

• DIMENSION & WEIGHT

Dimension: 256 (H) × 51.4 (W) × 46.2 (D) mm
 Weight: abt 400g (Transceiver+Emergency Battery)

SIZE DIMENSION

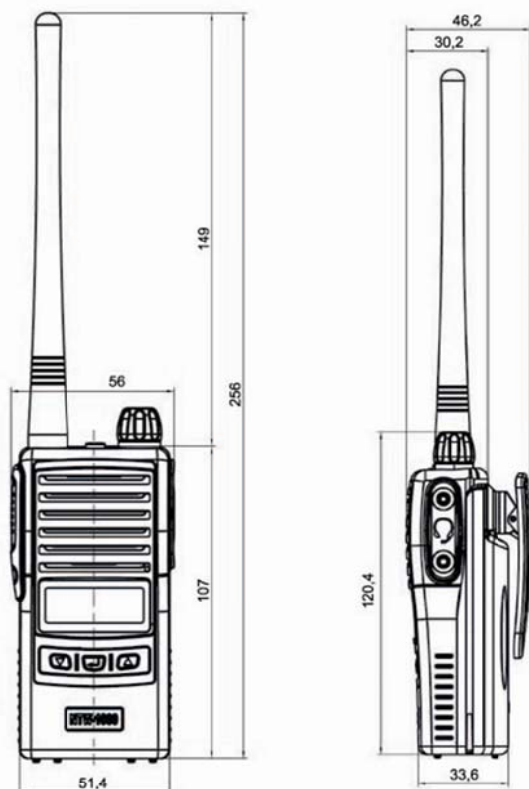

EQUIPMENT LIST

• STANDARD:

- Transceiver 1 set
- Emergency Battery 1 pc
- Belt Clip 1 pc
- Wrist Rope 1 pc

• OPTIONS:

- Rechargeable Battery 1 pc
- Charger 1 pc
- AC/DC Adaptor 1 pc



Battery
Emergency / Rechargeable



Wrist Rope

Belt Clip



Battery Charger

AC/DC Adapter

※ Specifications subject to change without notice.